Ultra Pure Water System
Model 3000

Installation Guide for Double Tank System

Each ***VistaPure*** system comes complete with everything needed for a complete installation including a captive air tank for storing about 2.7 gallons (10.2 liters) of distilled quality water. The system is designed to produce 25 gallons of distilled quality water in a 12 hour period. This is more than sufficient for most all dental, medical and laboratory uses. However, there may be a need for more than 2.7 gallons during a short period of time (e.g. technicians filling dental delivery bottles at the beginning of the work day).

Instead of purchasing an additional ***VistaPure*** system to meet the higher demand, installing another storage tank will do the job at much less cost. Adding a second tank will double the stored quantity of water to 5.4 gallons (20.4 liters). A third tank would increase the stored water to 8.1 gallons, etc. Simply contact your dealer and order the following ***VistaPure*** component parts to add a tank:

2.7 Gallon Storage Tank (white, captive air)	S9110
Tank Shut Off Valve (1/4” NPT x 1/4" Tube)	S6160P
Tee Union (1/4” Tube)	S6115P

Simply make the connections from # 103 on the manifold to the tanks (E), valves (J) and Tee as shown on the “natural” color 1/4" O.D. polyethylene tubing as shown below.

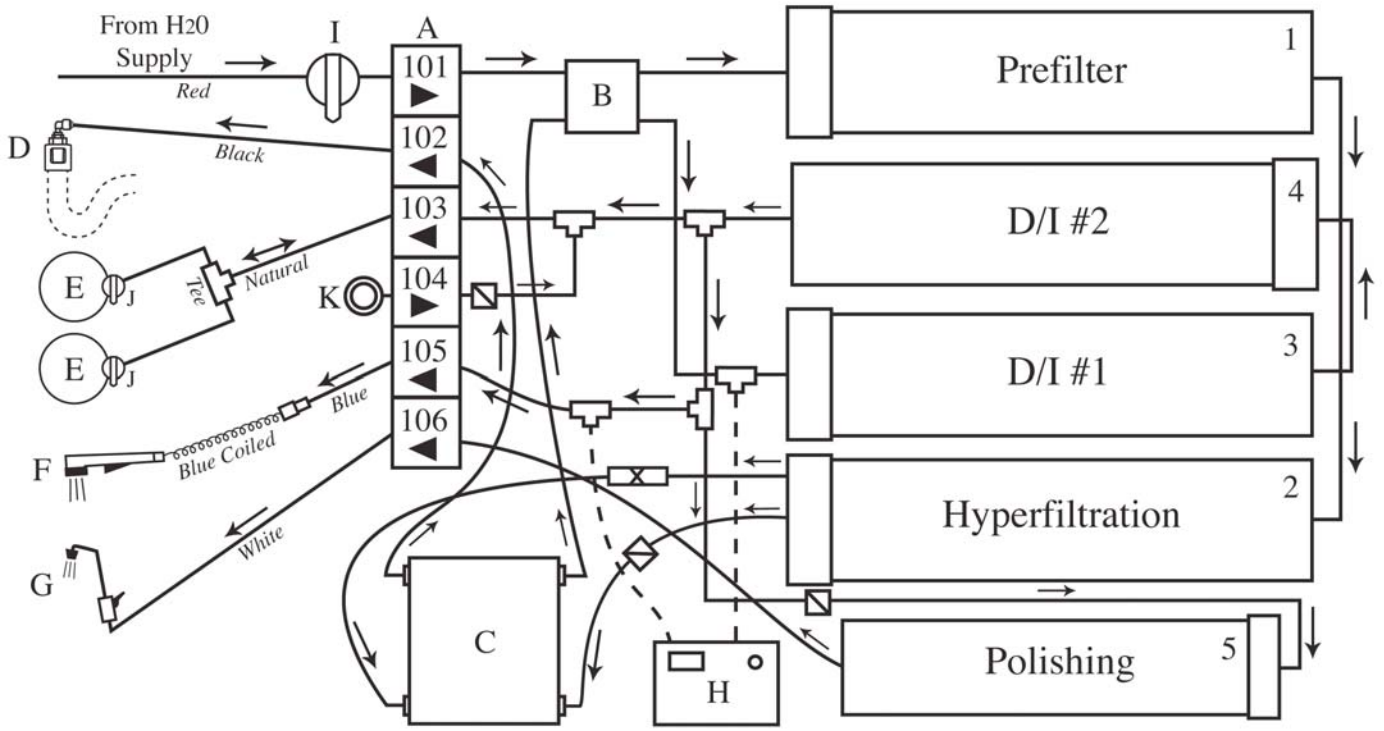

Vista Research Group, LLC

P.O. Box 321 • Ashland • Ohio • 44805-0321

419.281.3927 PH vistaresearchgroup.com vistatrn@bright.net 419.281.7380 FX

© 2007 VRG, LLC